Bid Documents

ENGINEERING DIVISION
327 N. Ashley Street
Valdosta, Georgia 31601

PI# 0020532

FOR: Bid # TIA-15: Resurfacing Phase I

Opening Date / Time: November 12, 2026 10:00 A.M.

NOTICE TO DEALERS/VENDORS

1. Any prices bid by dealer/vendor on any items offered to Lowndes County shall be the price effective at the date of delivery.

2. No delivery date of "ASAP" (as soon as possible) shall be considered acceptable on items that have a maximum delivery date listed in the specifications.

3. Lowndes County reserves the right to accept alternate bids on any or all items where maximum delivery date, as listed in the specification, is not met by the dealer/vendor.

4. All shipping is to be FOB Valdosta, GA 31601 and included in the total price unless otherwise stated in the bid document.

5. Signature below of authorized agent for dealer/vendor shall constitute recognition and acceptance of all conditions of the sale as listed above.

_____

Dealer/Vendor

_____

Authorized Agent

GENERAL SPECIFICATIONS

It is the intent of these specifications to furnish Lowndes County with the following requisitioned project, according to the attached. It is clearly understood that the following are minimum specifications and are made in order to show the exact specifications of the work proposed.

Lowndes County reserves the right to accept or reject any or all bids or to choose the bid considered to be in its best interest.

The final decision of purchase will be made upon the award of the Lowndes County Board of Commissioners.

Include the bid number on the outside of your return envelope.

NO BID WILL BE CONSIDERED IF RECEIVED AFTER THE DATE AND TIME SPECIFIED.

BID DOCUMENTS AND CONTRACT DOCUMENTS

FOR

TIA-15: Resurfacing Phase I

LOWNDES COUNTY ENGINEERING DIVISION

TABLE OF CONTENTS

1. Advertisement / Invitation to Bid
2. Instructions to Bidders
3. Proposal/Unit cost schedule
4. Notice of Award
5. Contract Agreement
6. Contract Conditions
7. Notice to Proceed
8. Drug-Free Workplace Certification
9. Waiver of Lien
10. Attachment 1 - Contractor Affidavit and Agreement (E-Verify)
11. Project Information Sheet
12. Typical Shoulder Detail Sheet

INVITATION TO BID

Lowndes County is accepting bids for

Bid # TIA-15: Resurfacing Phase I

The contract time is **180** calendar days. The Bid Documents may be obtained by emailing rebecca.bennett@lowndescounty.com and requesting the bid documents. The Bid documents can also be viewed at the Lowndes County Board of Commissioners office, 2nd floor Engineering Department, 327 N. Ashley Street, Valdosta, Georgia.

There will be a mandatory pre-bid meeting on October 27, 2026 at 10:00 A.M., in the Engineering Conference Room on the 2nd floor of the Lowndes County Administration Building, 327 N. Ashley Street.

Lowndes County will receive sealed proposals on this project until November 12, 2026 at 10:00 A.M., in the Lowndes County Administration Building, 2nd Floor, Room 227, located at 327 N. Ashley Street, Valdosta, Georgia 31601, (229-671-2424) where at such time and place the proposals will be publicly opened and read. A 5% bid bond is required.

All bidders shall be DOT approved contractors.

Run in Valdosta Daily Times October 8th & 22nd

INSTRUCTIONS TO BIDDERS

1. Proposals must be made upon the form of proposal attached hereto. They must be enclosed in a sealed plain envelope with bid number and endorsed with the title of the proposal, and must be mailed to the Lowndes County Board of Commissioners at 327 N. Ashley Street, Valdosta, Georgia 31601, Attn: Engineering Department.

2. The prices shall be written in the proposal in figures. No bidder will be allowed to withdraw his proposal for any reason after the bids have been opened.

3. The following specifications represent the minimum general size, weight, capacity and performance characteristics desired in the equipment to be purchased. These requirements are not intended to prevent obtaining fair prices or to eliminate competition, but to insure, if possible, that all bids submitted shall not be subject to correction or alteration after they have been filed, opened, and publicly read. In view of a usual wide disparity in details of design and manufacture, complete descriptive literature and manufacturer's specifications must be submitted each type of equipment offered. The County reserves the right to evaluate any or all bids, particularly where there is a range in the specifications. Special consideration will be given to the ready availability of repair parts and service.

4. Federal or State taxes are not applicable to Georgia Municipalities under the United States Code Title 26 and Georgia Exemption Certificate Number 3-465-686-300-1.

5. It is expressly understood by the bidder that written Notice of Award or purchase order by the County will constitute an agreement by the County. The Advertisement/Invitation to Bid, Instructions to Bidders, Proposal, Notice of Award, Contract Agreement, Contract Conditions, Notice to Proceed, Drug-Free Workplace Certification, Waiver of Lien, and the referenced Construction Plans and Drawings constitute the entire Agreement and understanding between Lowndes County Board of Commissioners and the Contractor in respect of this Project, and revokes any prior agreement or understanding relating to the subject matter of this Agreement. No change, amendment, termination or attempted waiver of any of the provisions herein shall be binding upon the other parties unless reduced to writing and signed by all parties hereto.

6. The bidder agrees that Lowndes County reserves the right to reject any or all proposals, or to accept the part of the bid considered to be in the best interest of the County.

7. Specifications referred to are minimum. Therefore, unless otherwise indicated by the bidder, the County will assume proposals meet or exceed all specifications.

8. The names of a certain brand, make, or definite specifications are to denote a quality standard of the article desired, but do not restrict bidders to be specific brand, make or manufacturer named; it is to set forth and convey to prospective bidders the general style, type, character and quality of the article desired.

9. The award of the contract will be made to the lowest responsible bidder taking into consideration quality performance and the time specified in the proposals for the performance of the contract. The County reserves the right to reject all bids as it appears in its own best interest and to waive technicalities.

10. During the bidding process, all changes, interpretations, and supplemental instructions to the contract documents shall be issued as addenda to all bidders. All addenda are to be acknowledged in the proposal.

11. Each bid must be accompanied by a Bid Bond in the amount of 5% of the bid. A certified check for this amount may be submitted in lieu of the Bid Bond. Bid Bonds on the Surety Company's standard form must be duly executed by the Bidder as principal, and must be by a surety company licensed to do business in the State of Georgia and listed in the latest issue of U. S. Treasury Circular 570. Failure to submit a properly executed Bid Bond or certified check will result in the bid being rejected.

12. Each bidder must inform himself fully on all the conditions at the site, transportation conditions, material costs, and all other matters affecting the cost of construction. Each bidder shall study the plans, specifications, contract and proposal form prior to submitting a proposal. Each bidder shall also make such examinations on the ground as necessary to thoroughly familiarize himself with the nature and extent of the proposed construction.

13. The contract documents are complimentary, and what is called for by one shall be binding as if called for by all.

14. The intent of the contract documents is to provide for all construction and completion of the work shown on the drawings and described in the specifications.

15. The latest edition of the Georgia Department of Transportation Standard Specifications for Construction of Roads and Bridges shall govern the work on this project.

16. The contract is a unit price contract with payment to be based on actual quantities of work measured. The list of items shown in the Unit Price Schedule is inclusive of all the work shown and described. In case of changes in the drawings and specifications that produce new items of work not described in the unit price schedule, Change Orders will be issued to include such items of work.

17. Lowndes County reserves the right to review and reject any subcontractors. A list of subcontractors shall be submitted to Lowndes County by the Contractor after the notice of award has been issued.

18. Lowndes County has requested Georgia Department of Transportation participation on this project. The contractor shall assume state participation in the base and paving of this project.

END OF SECTION

PROPOSAL

To the Lowndes County Board of Commissioners, Lowndes County, Georgia:

Submitted: _____, _____

The undersigned, as Bidder, hereby declares that he has examined the site of the work and has informed himself fully in regard to all conditions pertaining to the place where the work is to be done; that he has examined the Specifications and Drawings for the work and contractual documents relative thereto; and that he has satisfied himself to the work to be performed.

The Bidder proposes and agrees that, if he becomes the Successful Bidder on the basis of this Proposal, he will contract with the Lowndes County Board of Commissioners, Lowndes County, Georgia (herein called the "Owner"), in the form of the contract illustrated to furnish all necessary materials, equipment, machinery, tools, apparatus, means of transportation, and all necessary labor to complete the construction of the work in full, and in complete accord with the shown, noted, described, specified and reasonably intended requirements of the Specifications, Drawings, and Contract Documents to the full and entire satisfaction of the Owner, with a definite understanding that no money will be allowed for extra work except as set forth in the Contract Documents, for the following prices:

Total Bid $ _____

Submitted By: _____

_____
Company Name

Unit Cost Schedule for TIA-15: Resurfacing Phase I

ITEM	ITEM DESCRIPTION	QUANTITY	UNIT	UNIT COST	TOTAL COST
150	Traffic Control	1	LS	$	$
210	Grading per Mile	7.32	LM	$	$
402	Asphalt "Leveling Course", 80 lbs OGI	3,965	TN	$	$
402	Recycled Asphalt "Topping", 165 lbs 12.5 mm Superpave	8,177	TN	$	$
402	Recycled Asphalt "Topping", 220 lbs 12.5 mm Superpave	3,279	TN	$	$
413	Bituminous Tack Coat	11,713	GL	$	$
429	Rumble Strips (Set of 3)	3	EA	$	$
432	Mill Asphaltic Concrete Pavement, (Depth Varies)	27,107	SY	$	$
611	Adjust Manhole to Grade	4	EA	$	$
652	Traffic Stripe, 4 inch, White, Solid (Temporary)	49,315	LF	$	$
652	High Build Traffic Stripe, 5 inch, White, Solid	49,315	LF	$	$
652	Traffic Stripe, 4 inch, Yellow, Solid, Skip, or Double (Temporary)	85,061	LF	$	$
652	High Build Traffic Stripe, 5 inch, Yellow, Solid, Skip, or Double	47,678	LF	$	$
653	Thermoplastic Stripe, 24 inch, White, Solid (Stop Bar)	459	LF	$	$
654	Raised Pavement Markers, Type 1	1,236	EA	$	$
700	Permanent Grassing (Including Mulch)	7.10	AC	$	$
***	Contingency	1	LS	$ 50,000.00	$ 50,000.00

Revised: 9/28/2026

Total Bid on the Project: _____

Submitted By: _____

_____

ADDENDA

Receipt of the following addenda is acknowledged:

Addenda Number: _____ Date: _____

The Bidder proposes and agrees hereby to commence work under this Contract on a date to be specified in a written order of the Owner, and shall fully complete all work thereunder within the time described in the contract agreement.

The undersigned further agrees that, in case of failure on his part to execute the said Contract and the bond within fourteen (14) consecutive calendar days after written notice being given of the award of the Contract, the check or bid bond accompanying this bid and the moneys payable thereon, shall be paid into the funds of the Lowndes County Board of Commissioners, as liquidated damages for such failures; otherwise the check or bid bond accompanying this Proposal will be returned to the undersigned.

Attached hereto is a certified check on the

_____Bank of

_____

Or a Bid Bond by the

In the amount of

_____ Dollars

($_____) made payable to the Lowndes County Board of Commissioners in accordance with the conditions herein. The bid security will be in force for sixty (60) calendar days.

Submitted: _____

By: _____

Title: _____

(Note: If the Bidder is a corporation, the Proposal shall be signed by an officer of the corporation; if a partnership, it shall be signed by a partner. If signed by others, authority for signature shall be attached.)

Bidder's Address: _____

_____

Telephone Number: _____

END OF SECTION

NOTICE OF AWARD

To:

PROJECT DESCRIPTION: **TIA-15: Resurfacing Phase I**

The OWNER has considered the BID submitted by you for the above-described work in response to its advertisement for BIDS.

You are hereby notified that your BID has been accepted for items in the amount of:
$ _____

You are hereby required to execute the Agreement, and furnish the required Contractor's CERTIFICATION Of INSURANCE with a 30 day notice of cancellation and PERFORMANCE BOND within fourteen (14) calendar days from the date of this NOTICE to you.

If you fail to execute said AGREEMENT and to furnish said BOND and CERTIFICATIONS within fourteen (14) days from the date of this NOTICE, said OWNER will be entitled to consider all your rights arising out of the OWNER'S acceptance of your BID as abandoned and as a forfeiture of your BID BOND. The OWNER will be entitled to such other rights as may be granted by law.

You are required to return an acknowledged copy of the NOTICE OF AWARD to the OWNER.

Dated this_____day of_____, 2026

Lowndes County Board of Commissioners

BY: _____

TITLE: _____

Contractor: _____

_____

DATE: _____

LOWNDES COUNTY BOARD OF COMMISSIONERS
CONTRACT AGREEMENT

This agreement made and entered into this_____ day of _____ ,2026 and between Lowndes County Board of Commissioners, party of the first part (hereinafter called the County), and_____, party of the second part (hereinafter called the Contractor), who have been duly authorized to execute this agreement.

WITNESSETH: Whereas, the County and the Contractor, desire the improvement and repairs of a certain project and the Contractor desires and agrees to furnish and deliver all the material and to do and perform all the work and labor for said purpose. The project being more particularly described as follows:

TIA-15: Resurfacing Phase I

Failure to perform the above-listed tasks, frequency of tasks, or general instructions will be considered cause for termination of this contract with ten (10) days notice to the Contractor.

NOW, THEREFORE, in consideration hereinafter fully set out, the parties agree as follows:

1. The work and materials shall be in strict and entire conformity with the provisions of this contract and the plans and specification prepared (or approved) by the County Manager or his authorized representative the originals of which are in file in the office of Lowndes County Board of Commissioners and which said specifications are hereby made a part of this agreement as fully as to the same effect as if the same had been set forth at length in the body of this Agreement.

2. This Agreement is on a unit basis. It is understood that the quantities are approximate only and are subject either to increase or decrease and any increases or decreases are to be paid for at the contract price.

3. The County hereby agrees to pay to the Contractor for the faithful performance of this Agreement, subject to additions and deductions as provided in the Specifications or Proposal, in lawful money of the United States, the sum of: _____

4. The County and Contractor agree that the financing of this project shall be as follows: Payments will be made on a monthly basis.

5. The Contractor shall commence the work to be performed under this Agreement on a date specified in a written Notice to Proceed and shall substantially complete all work hereunder, except as otherwise provided in these documents for extension of the time limit, within **180** calendar days. Substantial completion is the time at which the project can be fully utilized for its intended purpose. Upon written notification to the Director of Engineering Services that the project is substantially complete, a final site visit will

be made and a punch list of deficient items will be generated. The Contractor will receive a written copy of the punch list, and must achieve final completion by correcting all punch list items within 30 days of receipt. Time is of the essence of this contract, and the Contractor shall pay to the County, not as a penalty, but as liquidated damages, the sum of $500.00 each calendar day that he shall be in default of completing the work, both substantial completion and final completion, within the time named herein. Because of the difficulty of fixing damages suffered by the County on account of such default, damages are herein agreed upon as stated.

6. The work shall be done in accordance with the laws of the State of Georgia under the direct supervision and to the entire satisfaction of the County. The decision of the Director of Engineering Services upon any question connected with the execution or fulfillment of this agreement and interpretation of the specifications or upon any failure or delay in the prosecution of the work by the Contractor shall be final and conclusive.

7. It is mutually agreed that the Contractor shall warranty all work done as a part of this contract agreement for a period of one year from the date of final acceptance by the County.

8. Lowndes County reserves the right to terminate this Agreement for non-compliance by issuing ten (10) days written notice to the Contractor.

9. Employees, aides, staff helpers, or any person who receives any form of consideration for services or who performs any services towards the execution of this Agreement are deemed to be the sole responsibility of the Contractor for the purposes of all Workers' Compensation and insurance claims. Lowndes County reserves the right to superintend the performance of this Agreement only to the extent that the desired results are obtained. No recommendation or requirement in this Agreement and list of specifications should be deemed to obligate the County under the Workers' Compensation Act to Contractor's employees, aides, staff, helpers or any person who receives any form of consideration for services or who performs any services towards the execution of the Agreement.

10. Nothing contained in the Agreement shall create a contractual relationship with or cause of action of a third party against Lowndes County.

11. Contractor agrees to indemnify, save and hold harmless, and defend Lowndes County, its officers, boards, and employees, from and against any liability for damages and for any liability or claims resulting from property damage or bodily injuries (including accidental death) which arise out of the Contractor's operation and provision of services, including but not limited to, reasonable attorneys' fees and costs if such fees and costs are deemed necessary by Lowndes County.

12. This Agreement may not be assigned by either party hereto without written

agreement signed by both parties. This Agreement and the rights of the parties hereunder shall be binding upon and insure to the benefit of the parties hereto and their respective successors and, if applicable, assigns.

13. Any notice or communications required or permitted hereunder shall be sufficiently given if sent Registered or Certified Mail, Return Receipt Requested, postage pre-paid, addressed as follows:

As to Contractor:

As to County: Lowndes County Board of Commissioners
327 N. Ashley Street
Valdosta, Georgia 31601
ATTN: Chad McLeod Director of Engineering Services

Or such address as shall be furnished by such notice to the other parties.

14. No waiver by either party of any default by the other party in the performance of any provision of this Agreement shall operate as to be construed as a waiver of any future default, whether like or different in character.

15. This Agreement shall be governed and construed in accordance with the laws of the State of Georgia.

16. If any provisions of this Agreement, or application thereof to any person or circumstance, shall to any extent be invalid, then such provision shall be modified if possible, to fulfill the intent of the parties as reflected in the original provision, the remainder of this Agreement or the application of such provision to persons or circumstances other than those as to which it is held invalid, shall not be affected thereby, and each provision of this Agreement shall be valid and enforced to the fullest extent permitted by law.

IN WITNESS WHEREOF, the parties hereto have executed this Agreement under their respective seals on the day and date below written, be it deemed an original contract.

Executed on behalf of
LOWNDES COUNTY

The ____ day of_____ 2026

By: _____
Chairman of
Board of Commissioners

Executed on behalf of
CONTRACTOR

The ___ day of _____, 2026

By: _____
Contractor

_____

_____

Recommended: _____
County Manager

Date: _____

Witness for County:

_____
County Clerk

Witness for Contractor:

_____

LOWNDES COUNTY BOARD OF COMMISSIONERS
CONTRACT CONDITIONS

1. All contract items and work shall be in accordance with the current edition of the Georgia Department of Transportation Standard Specifications for Construction of Roads and Bridges and/or special provisions and supplemental specifications attached and made a part of the contract.

2. Insurance - The contractor shall procure and maintain insurance of the types and to the limits specified in paragraphs (a) through (f) inclusive below. The contractor shall require each of his subcontractors to procure and maintain, until completion of the subcontractor's work, insurance of the types and to the limits specified in paragraphs (a) through (f) inclusive below. It shall be the responsibility of the contractor to ensure that all his subcontractors meet these requirements. Except as otherwise stated, the amounts and types of insurance shall conform to the following minimum requirements:

   Worker's Compensation - Coverage to apply for all employees for STATUTORY limits in compliance with applicable state and federal laws; if any operations are to be undertaken on or about navigable waters, coverage must be included for the USA Longshoremen & Harbor Workers Act and Jones Act; in addition, the policy must include EMPLOYERS LIABILITY for limits of $500,000/each accident; $500,000/disease - policy limit; $500,000/disease - each employee.

   (a) Commercial General Liability - Coverage must be afforded, under an occurrence form policy, including Premise Operations, Independent Contractors, Products and Completed Operations, Broad Form Property Damage Endorsement, with **Additional Insured Endorsement** in favor of the County in limits not less than $3,000,000/general aggregate; $3,000,000/products-completed operations (aggregate); $3,000,000/personal injury-advertising liability; $3,000,000/each occurrence; $100,000/fire damage legal; $10,000 medical payments. This coverage may be layered with excess umbrella liability coverage.

   (b) Business Auto Policy - Coverage must be afforded including coverage for all Owned vehicles, Hired/Non-Owned vehicles, with an **Additional Insured Endorsement in favor of the County**, for a combined single limit (bodily injury and property damage) of not less than $3,000,000/combined single limit (Bodily Injury/Property Damage); personal injury protection-statutory limits; $1,000,000 uninsured/underinsured motorist; $1,000,000/hired/non-owned auto liability. This coverage may be layered with excess umbrella liability coverage.

   (c) Certificate of Insurance - Certificates of all insurance required from the contractor shall be filed with the County and shall be subject to its approval for adequacy and protection. Certificates from the insurance carrier, stating the types of coverage provided, limits of liability and expiration dates, shall be filed with the County before operations are commenced. Lowndes County Board of Commissioners shall be identified as an **Additional Insured** for each type of coverage required by paragraphs (a) to (c) above. The required certificates of insurance shall not only name types of policies provided, but shall also refer

specifically to this contract/bid.

(d) The contractor shall provide a Certificate of Insurance to the County with a thirty (30) day notice of cancellation. In addition, the County will be shown as **Additional Insured**, with a Hold harmless Agreement in favor of the County. The certificate should also indicate if the cover is provided under a "claims made" or "per occurrence" form. If any cover is provided under a claims made form, the certificate will show a retroactive date (in instances of contract renewals or extensions), which should be the same date of the original/first contract or prior.

(e) If the initial insurance expires prior to the completion of the work, renewal certificates shall be furnished thirty (30) days prior to the date of their expiration.

3. All construction supervision, testing (except that testing required of the contractor), and measurements of quantities will be made by the Lowndes County Engineering Division. Final acceptance of the project will be made by the Director of Engineering Services and presented to the County Manager and Lowndes County Board of Commissioners for final payment.

4. The Contractor is required to furnish the Lowndes County Engineering Division with test reports and technical data showing that the materials (compaction, moisture content, % clay, gradation, course thickness, etc.) meet the appropriate requirements of the Georgia Department of Transportation Standard Specifications.

5. All base pits and borrow pits required for completion of the work shall be provided by the Contractor.

6. Retainage shall be as follows: An amount of five (5) percent of the gross total invoiced amount will be retained throughout the project.

7. Retainage amounts shall be held until: a) all items on the punch list are resolved, b) a lien release is provided by the Contractor to the County for all Subcontractors and material suppliers, c) a final pay request is submitted to the County, or d) the project is accepted by the Lowndes County Board of Commissioners.

8. The Contractor represents that it has a current Occupational Tax Receipt from a local government in Georgia.

9. The Contractor shall obtain all necessary local, state, federal permits as required by law for the construction of the project.

10. The Contractor shall notify the County Engineering Division at least 24 hours prior to beginning any phase of construction so that a County Inspector can be present.

11. Traffic Control shall be provided in accordance to Georgia Department of

Transportation Special Provision, Section 150. Unless otherwise indicated in the Proposal, this item will not be paid for as a separate pay item but shall be incorporated as a part of the contract.

12. All construction plans and drawings can be obtained from the office of the Lowndes County Engineering Division

13. This Agreement will terminate immediately and absolutely as such time as appropriated and otherwise un-obligated funds are no longer available to satisfy the obligation of Lowndes County under this Agreement.

14. Should completion of any portion of the services be delayed for causes beyond the control or without the fault or negligence of the County including force majeure, the time for performance shall be extended for a period equal to the delay and the parties shall mutually agree on the terms and conditions upon which the services may be continued. Force majeure includes, but is not restricted to, acts of God or the public enemy, acts of the Government of the United States or of the several states, or any foreign country, or any of the preceding acts of contractors or agents, fires, floods, epidemics, riots, quarantine restrictions, strikes, civil insurrections, freight embargoes, and unusually severe weather.

END OF SECTION

NOTICE TO PROCEED

DESCRIPTION: **TIA-15: Resurfacing Phase I**

You are hereby notified to commence WORK, in accordance with the Agreement dated_____, 2026 on or before_____, 2026 and you are to complete the work within **180** consecutive calendar days thereafter. The date of substantial completion of the work is therefore _____, 2027.

Lowndes County Board of Commissioners

BY: _____

TITLE: _____

ACCEPTANCE OF NOTICE

Receipt of the above NOTICE TO PROCEED is hereby acknowledged

Contractor: _____

This the_____day of_____, 2026

BY: _____

TITLE: _____

Employer Identification
Number: _____

END OF SECTION

DRUG-FREE WORKPLACE CERTIFICATION

The undersigned certifies that the provisions of code sections 1 through 50-24-6 of the official code of Georgia annotated, related to the "DRUG-FREE WORKPLACE ACT", have been complied with in full. The undersigned further certifies that:

1. A Drug-Free workplace will be provided for the Contractor's employees during the performance of the contractor; and

2. Each Contractor who hires a sub-contractor to work in a free workplace shall secure from that sub-contractor the following written certification: _____ certifies to Lowndes County that a Drug-Free workplace will be provided for the Contractor's and/or sub-contractor's employees during the performance of this contract known as **TIA-15: Resurfacing Phase I.**

3. Pursuant to paragraph (7) of subsection (B) of Code Section 50-24-3 OCGA. Also, the undersigned further certifies that he/she will not engage in the unlawful manufacture, sale, distribution, dispensation, possession, or use of a controlled substance or marijuana during the performance of the contract.

_____ _____

Contractor or Sub-Contractor Date

_____

Title

END OF SECTION

WAIVER OF LIEN

Know by all men by these presents, _____**on the TIA-15: Resurfacing Phase I.** Know that all bills for labor, materials, supplies, etc., and applicable state taxes in connection with the construction of this project, and that there are no outstanding accounts whatsoever as a result of WORK performed on this project. Therefore, _____ does hereby waive, release, and relinquish any and all right to claim any lien or liens for work done or material furnished, or any kind or class of lien whatsoever.

_____
Contractor

BY:_____

TITLE: _____

DATE: _____

_____
Notary Public

_____
Date

END OF SECTION

GA Illegal Lowndes County, GA
Immigration Reform and Enforcement Act
Required Contract Addendum
(Revised January 23, 2012)

STATE OF GEORGIA
CONTRACTOR AFFIDAVIT AND AGREEMENT

The undersigned, who, after being duly sworn, states under oath and agrees to for and on behalf of the Contractor as follows:

1. By executing this Affidavit, the undersigned verifies the compliance of the Contractor with the Georgia Illegal Immigration Reform and Enforcement Act of 2011, Sections 2 and 3, as amended (O.C.G.A. § 13-10-90 et seq., the "Act") and Georgia Department of Labor Rules 300-10-1-.01 et seq. (and, for a contract or agreement relating to public transportation, with the rules regarding the Act of the Georgia Department of Transportation; the "GDOT Rules"), stating affirmatively that the individual, firm, or corporation which is contracting with the Board of Commissioners of Lowndes County, Georgia ("Lowndes County") has registered with, is authorized to use, is using, and will continue to use throughout the contract period, a Federal Work Authorization Program* in accordance with the applicable provisions and deadlines established in the Act and Georgia Department of Labor Rule 300-10-1-.02 (and, for a contract or agreement relating to public transportation, established in the GDOT Rules).

2. The undersigned Contractor further agrees that, should it employ or contract with any subcontractor(s) in connection with the physical performance of services pursuant to the Contract with Lowndes County of which this Affidavit is a part, the undersigned Contractor will secure from such subcontractor(s) similar verification of compliance with the Act and Georgia Department of Labor Rules 300-10-1-.01 et seq. (and, for a contract or agreement relating to public transportation, verification of compliance with the GDOT Rules) through the subcontractor's execution of the subcontractor affidavit the Act and the rules and regulations thereunder. The undersigned Contractor further agrees to maintain records of such compliance and provide a copy of each such Affidavit and verification to Lowndes County within five (5) business days after the subcontractor(s) is retained to perform such service. The Affidavit from each subsequent contractor shall include the subcontractors (or sub-subcontractor's) name and address, E-verify/Federal Work Authorization Program user identification number and date of authorization to use the Federal Work Authorization Program, the name of the project, and the name of the public employer for the project.

_____ _____

Contractor's E-verify/Federal Work Authorization Company Identification Number

Name of Project

_____

Date of Authorization (Date Number Obtained)

Lowndes County
Board of Commissioners
Name of Public Employer

[Signatures continue on following page]

GA Illegal Lowndes County, GA
Immigration Reform and Enforcement Act
Required Contract Addendum
(Revised January 23, 2012)

I DECLARE UNDER PENALTY OF PERJURY THAT THE FOREGOING IS TRUE AND CORRECT, AND AGREE TO THE FOREGOING FOR AND ON BEHALF OF THE CONTRACTOR.

_____ _____

BY: Authorized Officer or Agent of Contractor Date

_____

Contractor's Name

_____

Title of Authorized Officer or Agent of Contractor

_____

Printed Name of Authorized Officer or Agent of Contractor

_____

_____

Contractor's Address

Sworn to and subscribed before me

This ____ day of _____, 20__

_____

Notary Public

My commission expires: _____

* Any of the electronic verification of work authorization programs operated by the United States Department of Homeland Security or any equivalent federal work authorization program operated by the United States Department of Homeland Security to verify information of newly hired employees, commonly known as E-Verify.

TIA-15: Resurfacing Phase I

Project Information Sheet

Jacqueline Street - 0.13 miles – 21' wide – Beginning at CR 317 (Jeannie Street) Ending at joint S.R. 7 (US HWY 41 S)

- Bituminous tack coat before each lift
- Leveling – 80lbs OGI
- Topping – 165lbs 12.5 mm Superpave
- All shoulder clippings must be picked up on the entire road
- Shoulder grading – See detail
- Permanent grassing (Hydro-seed)
- Temporary (double yellow) centerline stripe 4" wide – once after leveling – once after topping
- Permanent (double Yellow) centerline stripe 5" wide 15 days after topping
- 1 Stop Bar (24" Thermoplastic)

Jeannie Street – 0.20 miles – 21' wide – Beginning at joint S.R. 7 (US HWY 41 S) ends at CR 318 (Copeland Road)

- Bituminous tack coat before each lift
- Leveling – 80lbs OGI
- Topping – 165lbs 12.5 mm Superpave
- All shoulder clippings must be picked up on the entire road
- Shoulder grading – See detail
- Permanent grassing (Hydro-seed)
- Temporary (double yellow) centerline stripe 4" wide – once after leveling – once after topping
- Permanent (double Yellow) centerline stripe 5" wide 15 days after topping
- 1 Stop Bar (24" Thermoplastic)

Jennifer Street – 0.12 miles – 19' wide - Beginning at CR 317 (Jeannie Street) Ending at joint S.R. 7 (US HWY 41 S)

- Bituminous tack coat before each lift
- Leveling – 80lbs OGI
- Topping – 165lbs 12.5 mm Superpave
- All shoulder clippings must be picked up on the entire road
- Shoulder grading – See detail
- Permanent grassing (Hydro-seed)
- Temporary (double yellow) centerline stripe 4" wide – once after leveling – once after topping
- Permanent (double Yellow) centerline stripe 5" wide 15 days after topping
- 1 Stop Bar (24" Thermoplastic)

Judie Ann Road – 0.25 miles – 21' wide - Beginning at joint S.R. 7 (US HWY 41 S) Ending at CR 318 (Copeland Road)

- Bituminous tack coat before each lift
- Leveling – 80lbs OGI
- Topping – 165lbs 12.5 mm Superpave
- All shoulder clippings must be picked up on the entire road
- Shoulder grading – See detail
- Permanent grassing (Hydro-seed)
- Temporary (double yellow) centerline stripe 4" wide – once after leveling – once after topping
- Permanent (double Yellow) centerline stripe 5" wide 15 days after topping
- 1 Stop Bar (24" Thermoplastic)

Lineberger Drive – 0.06 miles – 18' wide – A portion beginning at joint SR 31 (Madison Hwy) Ending at CR 292 (Grove Street) - Lineberger Drive – 0.07 miles – 12' wide – A portion beginning at CR 293 (Grove Street) Ending at CR 292 Natcom Street

- Bituminous tack coat before each lift
- Leveling – 80lbs OGI
- Topping – 165lbs 12.5 mm Superpave
- All shoulder clippings must be picked up on the entire road
- Shoulder grading – See detail
- Permanent grassing (Hydro-seed)
- Temporary (double yellow) centerline stripe 4" wide – once after leveling – once after topping
- Permanent (double Yellow) centerline stripe 5" wide 15 days after topping

Grove Street – 0.12 miles – 15' wide – Beginning at CR 292 (Lineberger Drive) Ending at Dead End.

- Bituminous tack coat before each lift
- Leveling – 80lbs OGI
- Topping – 165lbs 12.5 mm Superpave
- All shoulder clippings must be picked up on the entire road
- Shoulder grading – See detail
- Permanent grassing (Hydro-seed)
- 2 Stop Bars (24" Thermoplastic)

Highland Drive – 0.10 miles – 20' wide – Beginning at joint SR 31 (Madison Hwy) Ending at joint Curb & Gutter section

- Bituminous tack coat before each lift
- Leveling – 80lbs OGI
- Topping – 165lbs 12.5 mm Superpave
- All shoulder clippings must be picked up on the entire road
- Shoulder grading – See detail
- Permanent grassing (Hydro-seed)
- Temporary (double yellow) centerline stripe 4" wide – once after leveling – once after topping
- Permanent (double Yellow) centerline stripe 5" wide 15 days after topping

Natcon Street – 0.10 miles - 18' wide – Beginning at CR 292 (Lineberger Drive) Ending at CR 292 (Highland Drive)

- Bituminous tack coat before each lift
- Leveling – 80lbs OGI
- Topping – 165lbs 12.5 mm Superpave
- All shoulder clippings must be picked up on the entire road
- Shoulder grading – See detail
- Permanent grassing (Hydro-seed)
- Temporary (double yellow) centerline stripe 4" wide – once after leveling – once after topping
- Permanent (double Yellow) centerline stripe 5" wide 15 days after topping
- 1 Stop Bar (24" Thermoplastic)

Arrowhead Drive – 0.15 miles - 23' wide – Beginning at CR 283 (Old Valdosta-Bellville Road) Ending at CR 1057 (Princess Drive)

- Bituminous tack coat before each lift
- Leveling – 80lbs OGI
- Topping – 165lbs 12.5 mm Superpave
- All shoulder clippings must be picked up on the entire road
- Shoulder grading – See detail
- Permanent grassing (Hydro-seed)
- Temporary (double yellow) centerline stripe 4" wide – once after leveling – once after topping
- Permanent (double Yellow) centerline stripe 5" wide 15 days after topping
- 2 Stop Bars (24" Thermoplastic)

Oak Hill Drive – 0.62 miles – 18' wide – Beginning at joint SR 376 (Clyattville-Lake Park Road) Ending at joint SR 376 (Clyattville-Lake Park Road)

- Mill entire road bed to Base - (Depth Varies)
- Topping – 220lbs 12.5 mm Superpave
- Temporary (double yellow) centerline stripe 4" wide – once after topping
- Permanent (double Yellow) centerline stripe 5" wide 15 days after topping

Manor Court – 0.12 miles – 16' wide – Beginning at Joint CR 201 (Mulligan Road) Ending at Dead End

- Bituminous tack coat before each lift
- Leveling – 80lbs OGI
- Topping – 165lbs 12.5 mm Superpave
- All shoulder clippings must be picked up on the entire road
- Shoulder grading – See detail
- Permanent grassing (Hydro-seed)

Roberts Road – 0.56 miles – 21' wide – Beginning at Joint CR 204 (Davidson Road) Ending at Dead End.

- Bituminous tack coat before each lift
- Leveling – 80lbs OGI
- Topping – 165lbs 12.5 mm Superpave
- All shoulder clippings must be picked up on the entire road
- Shoulder grading – See detail
- Permanent grassing (Hydro-seed)
- Temporary (double yellow) centerline stripe 4" wide – once after leveling – once after topping
- Permanent (double Yellow) centerline stripe 5" wide 15 days after topping

Worthington Street – 0.05 miles – 20' wide - Beginning at CR 604 (Worthington Triangle) Ending at CR 379 (Danieli Street)

- Mill entire road bed to Base - (Depth Varies)
- Topping – 220lbs 12.5 mm Superpave
- Temporary (double yellow) centerline stripe 4" wide – once after topping
- Permanent (double Yellow) centerline stripe 5" wide 15 days after topping
- 2 Stop Bars (24" Thermoplastic)

Worthington Triangle - 0.12 miles – 11' wide - Beginning at CR 335 (Worthington Street) Ending at CR 335 (Worthington Street)

- Mill entire road bed to Base - (Depth Varies)
- Topping – 220lbs 12.5 mm Superpave

Antilla Street – 0.10 miles – 20' wide – Beginning at CR 343 (Riviera Prado) Ending at CR 346 (Casa Loma Street)

- Mill entire road bed to Base - (Depth Varies)
- Topping – 220lbs 12.5 mm Superpave
- Temporary (double yellow) centerline stripe 4" wide – once after topping
- Permanent (double Yellow) centerline stripe 5" wide 15 days after topping
- 2 Stop Bars (24" Thermoplastic)

Casa Loma Street – 0.05 miles – 20' wide – A portion beginning at CR 323 (Old US 41 S) Ending at CR 326 (Granada Street) – Casa Loma Street – 0.17 miles – 14' wide – A portion beginning at CR 326 (Granada Street) ending at CR 343 (Riviera Prado)

- Mill entire road bed to Base - (Depth Varies)
- Topping – 220lbs 12.5 mm Superpave
- Temporary (double yellow) centerline stripe 4" wide – once after topping
- Permanent (double Yellow) centerline stripe 5" wide 15 days after topping
- 3 Stop Bars (24" Thermoplastic)

San Sebastian Street – 0.06 miles – 20' wide – Beginning at CR 343 (Riviera Prado) Ending at Dead End.

- Mill entire road bed to Base - (Depth Varies)
- Topping – 220lbs 12.5 mm Superpave
- Temporary (double yellow) centerline stripe 4" wide – once after leveling – once after topping
- Permanent (double Yellow) centerline stripe 5" wide 15 days after topping
- Adjust (1) manhole to grade
- 1 Stop Bar (24" Thermoplastic)

Valencia Street – 0.40 miles – 11' wide – Beginning at CR 326 (Granada Street) ending at Milano Street

- Mill entire road bed to Base - (Depth Varies)
- Topping – 220lbs 12.5 mm Superpave
- Adjust (3) manholes to grade
- 1 Stop Bar (24" Thermoplastic)

Clydetta Drive – 0.39 miles – 21' wide – Beginning at CR 323 (Old US 41 S) Ending at CR 343 (Riviera Prado)

- Mill entire road bed to Base - (Depth Varies)
- Topping – 220lbs 12.5 mm Superpave
- Temporary (double yellow) centerline stripe 4" wide – once after leveling – once after topping
- Permanent (double Yellow) centerline stripe 5" wide 15 days after topping
- 2 Stop Bars (24" Thermoplastic)

Danieli Drive South – 0.10 miles – 20' wide – Beginning at joint S.R. 7 (US HWY 41 S) Ending at CR 323 (Old US 41 S)

- Mill entire road bed to Base - (Depth Varies)
- Topping – 220lbs 12.5 mm Superpave
- Temporary (double yellow) centerline stripe 4" wide – once after topping
- Permanent (double Yellow) centerline stripe 5" wide 15 days after topping
- 1 Stop Bar (24" Thermoplastic)

Granada Street – 0.26 miles – 18' wide – Beginning at CR 345 (Clydetta Drive) Ending at CR 329 (Valencia Street)

- Mill entire road bed to Base - (Depth Varies)
- Topping – 220lbs 12.5 mm Superpave
- Temporary (double yellow) centerline stripe 4" wide – once after topping
- Permanent (double Yellow) centerline stripe 5" wide 15 days after topping
- 4 Stop Bars (24" Thermoplastic)

San Carlos Drive – 0.07 miles – 18' wide – Beginning at CR 343 (Riviera Prado) Ending at Dead End.

- Mill entire road bed to Base - (Depth Varies)
- Topping – 220lbs 12.5 mm Superpave
- Temporary (double yellow) centerline stripe 4" wide – once after topping
- Permanent (double Yellow) centerline stripe 5" wide 15 days after topping
- 3 Stop Bars (24" Thermoplastic)

Pinta Street – 0.08 miles – 18' wide – Beginning at CR 343 (Riviera Prado) Ending at CR 329 (Valencia Street)

- Mill entire road bed to Base - (Depth Varies)
- Topping – 220lbs 12.5 mm Superpave
- Temporary (double yellow) centerline stripe 4" wide – once after topping
- Permanent (double Yellow) centerline stripe 5" wide 15 days after topping
- 2 Stop Bars (24" Thermoplastic)

Nina Street – 0.08 miles – 13' wide – Beginning at CR 343 (Riviera Prado) Ending at CR 329 (Valencia Street)

- Mill entire road bed to Base - (Depth Varies)
- Topping – 220lbs 12.5 mm Superpave
- 1 Stop Bar (24" Thermoplastic)

Santa Maria Street – 0.09 miles – 11' wide - Beginning at CR 343 (Riviera Prado) Ending at CR 329 (Valencia Street)

- Mill entire road bed to Base - (Depth Varies)
- Topping – 220lbs 12.5 mm Superpave
- 1 Stop Bar (24" Thermoplastic)

Milano Street – 0.08 miles – 12' wide - Beginning at CR 343 (Riviera Prado) Ending at CR 329 (Valencia Street)

- Mill entire road bed to Base - (Depth Varies)
- Topping – 220lbs 12.5 mm Superpave
- 1 Stop Bar (24" Thermoplastic)

Winona Circle – 0.09 miles – 13' wide – Beginning at CR 379 (Danieli Drive) Ending at CR 577 (Deosta Drive)

- Mill entire road bed to Base - (Depth Varies)
- Topping – 220lbs 12.5 mm Superpave
- 2 Stop Bars (24" Thermoplastic)

Hershel Drive – 0.25 miles – 21' wide – Beginning at New Joint CR 703 (Howell Drive) Ending at New Joint CR 703 (Howell Drive)

- Bituminous tack coat before each lift
- Leveling – 80lbs OGI
- Topping – 165lbs 12.5 mm Superpave
- All shoulder clippings must be picked up on the entire road
- Shoulder grading – See detail
- Permanent grassing (Hydro-seed)
- Temporary (double yellow) centerline stripe 4" wide – once after leveling – once after topping
- Permanent (double Yellow) centerline stripe 5" wide 15 days after topping
- 2 Stop Bars (24" Thermoplastic)

Eulie Woods Road – 0.42 miles – 21' wide – Beginning at CR 807 (Woodfield Road) Ending at Dead End.


- Bituminous tack coat before each lift
- Leveling – 80lbs OGI
- Topping – 165lbs 12.5 mm Superpave
- All shoulder clippings must be picked up on the entire road
- Shoulder grading – See detail
- Permanent grassing (Hydro-seed)
- Temporary (double yellow) centerline stripe 4" wide – once after leveling
- Temporary (double yellow) centerline stripe 4" wide – once after topping
- Permanent (double yellow) centerline stripe 5" wide - 15 days after topping
- 1 Stop Bar (24" Thermoplastic)

Rocky Ford Road – 4.67 miles – 21.5' wide – Beginning at Joint North side of Knights Ferry Road Ending at Clyattville-Nankin Road

- Bituminous tack coat before each lift
- Leveling – 80lbs OGI
- Topping – 165lbs 12.5 mm Superpave
- Pick up all shoulder clippings on entire road
- Shoulder grading – See detail
- Permanent grassing (Hydro-seed)
- Temporary centerline stripe 4" wide – once after leveling
- Temporary centerline and edge line stripe 4" wide – once after topping
- Permanent centerline and edge line stripe 5" wide - 15 days after topping
- 3 Stop Bars (Thermoplastic)
- 3 Asphalt rumble strips (Set of 3)
- RPM's

LOWNDES COUNTY
TYPICAL SHOULDER DETAIL

EARTH SHOULDER
FILLING

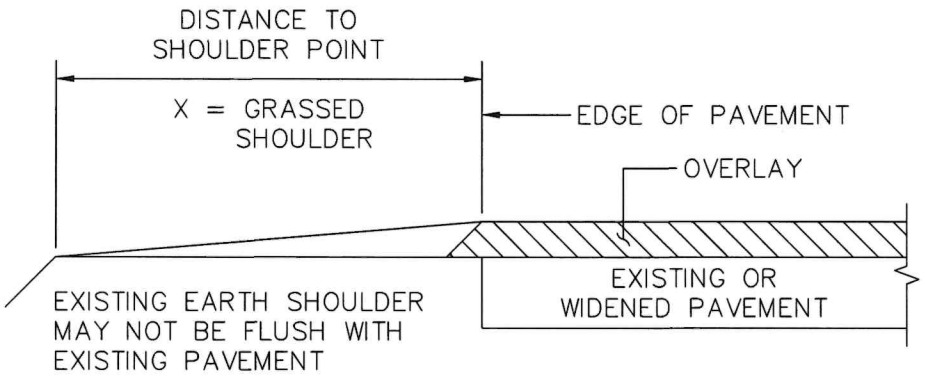

X = 4'–0" DISTANCE TO SHOULDER POINT,
REQUIRED AT ALL LOCATIONS

TYPICAL SECTION

SHOULDER FILLING
NOT TO SCALE

(1) FILL EXISTING EARTH SHOULDER AT VARIABLE DEPTH AS REQUIRED TO PROVIDE A SMOOTH GRADE FROM THE NEW EDGE OF PAVEMENT ELEVATION TYING INTO EXISTING EARTH SHOULDER.
(2) ALL GRADING, INCLUDING ANY BORROW MATERIAL, SHALL BE INCLUDED IN PRICE BID FOR GRADING PER MILE.
(3) PICK UP ALL SHOULDER CLIPPINGS ALONG ENTIRE ROAD INCLUDED IN THE PROJECT.

Revised 11/19/2021